









- Stützwinden sind komplett eingefahren, Kurbel gesichert
- Bremsanlage und ABS betriebsbereit
- Hub-/Senkventil in Fahrstellung
- Ersatzrad gesichert
- Werkzeugkiste geschlossen und gesichert
- Verdeck, Plane, Türen, Bordwände geschlossen und gesichert
- Luftbehälter entwässert
- Zuggesamtgewicht und Achslasten vorschriftsgemäß
- Schnitziges Zubehör vollständig vorhanden und sicher verstaut

- Luft- und Elektroanschlüsse korrekt verbunden
- Beleuchtungseinrichtungen funktionsfähig und gereinigt
- Reifen und Felgen intakt. Reifendruck richtig eingestellt
- Palettenkorb-/kastendeckel verriegelt
- Unterlegkeile gesichert
- Ladung vorschriftsmäßig verteilt und gesichert
- Feststellbremse gelöst
- Dach frei von Schnee, Eis und Wasser

Berger Fahrzeugtechnik Ges.m.b.H.
 Rettenbach 10 a
 6241 Radfeld / Austria

www.berger-ecotrail.com

Typ: **SAPL 24LTMN**

Tare Weight:

W:

b

BERGER

VA9USLAKTDFZT0190

1-

2-

3-

4-








VALX

Model	
Capacity	
Weight	
Length	
Material	







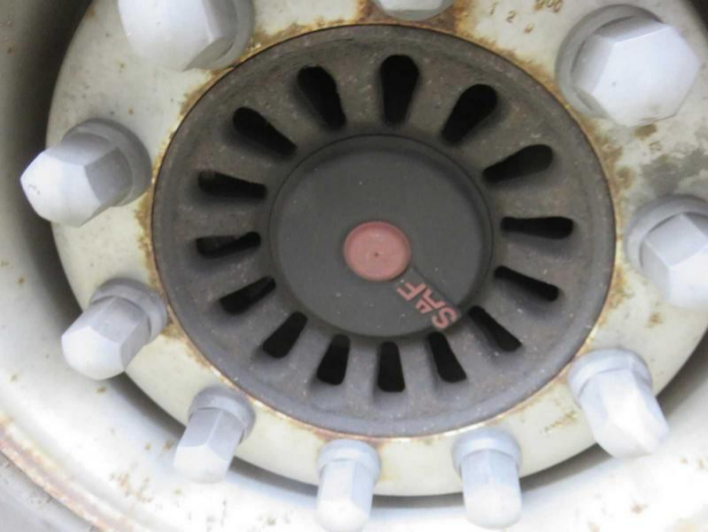































WARNING: DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.

1. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.	2. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.
3. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.	4. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.
5. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.	6. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.
7. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.	8. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.
9. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.	10. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.

WARNING: DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED. DO NOT OPEN THIS DOOR WHILE THE TRAILER IS BEING TOWED.







G Pecotrill

G pecotrail











75 A



PL

22 7452



PL PP 743YP



70 80 90











TreadMax
RETREAD

DEP400



GOODYEAR

35/50R19.5

160 J

19.5 x 19.5

A close-up photograph of a black dial indicator. The indicator's body is black plastic with a white scale window. The scale has vertical markings, with the number '10' printed below a specific mark. A dark, textured cylindrical object is positioned against the indicator's tip. The background is a light-colored, textured surface.

10





GOODYEAR

100% TUBE TYPE 42PSI

435/50R19.5

160 J

S&P



FUELMAX T

TUBELESS

UNISEN

REGROOVABLE TFR

RADIAL

SAFETY



GOODYEAR

435/50R19.5

160J

GOODYEAR

NEW 100%









ENERGY

1200
1500

MADE IN CHINA

SUNSHINE

ST-01∞
NEVER ENDING
TUBELESS RADIAL

100S



435150 R 19.5

TRAC TREAD PATTERN

160 J
122 PR L

MADE IN ITALY







RETREAD

1180R 000000

1180R 000000

19.5X14.00

124

MEX



LH

NT

435/50R19.5

100% Polyester
100% Polyester



10



RETFREAD

425







ST-0100
NEVER ENDING

RESURFACIBLE TIRELESS RADIAL

MCE

FRT

